

MALVA (BSM-S, BSRM-S) LACQUERED



TYPES

- Straight (BSM-S) and curved (BSRM-S)

TUBES

- Horizontal, round Ø 15 mm

COLLECTORS

- Vertical, semi-round Ø 42 mm

COLOURS

- Standard colour white RAL 9016
- Extensive colour chart see p. 16

SPECIAL

- The horizontal tubes of type BSRM-S are slightly bent (10°).

BRACKETS

- Wall brackets standard
- BSM-S also available as free-standing radiator, see p. 200

TECHNICAL

- Electrically laser welded (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✓ Mixed radiator

TECHNICAL DRAWINGS

- See p. 203

CONNECTION


- ✓ One-point connection for one-pipe system (see p. 301)
 - ✓ One-point connection for two-pipe system (see p. 301)
 - ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
 - ✓ Two-point connection for two-pipe system (standard) (see p. 300)
 - ✗ Integrated valve
- For connection at the bottom a flow tube is needed, this flow tube is standard delivered in the right collector.
 - For connection at the top 45, 54 a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 303.

ABOUT MALVA LACQUERED

The ladder to an optimal bathroom comfort

A ladder radiator that keeps towels warm and immediately heats up the entire bathroom to the desired temperature. Quickly and easily mountable thanks to the handy centre connection. The thin, round tubes provide a playful and delicate whole. As soon as it is hanging all you have to do is enjoy. The wonderful heat and the trendy, harmonic design.

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 202



ref. nr. 118210300009016
Fittings, see p. 313

INCLUDED FREE OF CHARGE



standard, folding chrome plated
drying and stacking rack


Other accessories, see p. 201



BSM-S

HOW TO ORDER MALVA LACQUERED

Delivery time 15 - 30 working days
(transport duration not included)

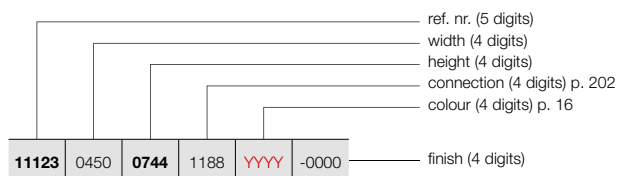


FREE-STANDING INSTALLATION (BSM-S)


See p. 200 for additional accessories.

HOW TO ORDER STOCK RADIATOR MALVA LACQUERED

Delivery time 5 working days
(transport duration not included)



MALVA (BSM-S, BSRM-S) LACQUERED



BSM-S









BSRM-S





REFERENCE CODE CUSTOM MADE MALVA LACQUERED							TECHNICAL DATA						short ref. nr. RAL 9016 stock		
							tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.		weight (kg)	water content (l)
REF. NR. MALVA LACQUERED BSM-S : 11123															
11123	0450	0744	1188	YYY	-0000	21	450	744	356	188	1,25	6,45	2,55	300	-
		1122				32	450	1122	534	282	1,25	9,40	4,00	500	-
		1338				40	450	1338	638	332	1,28	11,38	4,76	500	-
		1689				50	450	1689	808	412	1,32	14,60	6,00	750	-
11123	0500	0744	1188	YYY	-0000	21	500	744	389	203	1,27	6,87	2,67	300	-
		1122				32	500	1122	585	309	1,25	10,07	4,18	500	11123-02
		1338				40	500	1338	698	363	1,28	12,17	4,99	750	-
		1689				50	500	1689	885	456	1,30	15,58	6,30	1000	11123-06
11123	0600	0744	1188	YYY	-0000	21	600	744	455	232	1,32	7,70	2,90	300	-
		1122				32	600	1122	684	361	1,25	11,40	4,55	500	11123-03
		1338				40	600	1338	816	424	1,28	13,74	5,45	750	11123-04
		1689				50	600	1689	1035	538	1,28	17,55	6,90	1000	11123-07
		1959				60	600	1959	1247	639	1,31	20,65	8,20	1250	-
11123	0750	0744	1188	YYY	-0000	21	750	744	552	273	1,38	8,95	3,25	500	-
		1122				32	750	1122	828	437	1,25	13,40	5,10	750	-
		1338				40	750	1338	989	514	1,28	16,10	6,13	1000	-
		1689				50	750	1689	1253	662	1,25	20,50	7,80	1250	11123-08
		1959				60	750	1959	1483	783	1,25	24,40	9,20	1500	11123-09
REF. NR. MALVA LACQUERED BSRM-S : 11126															
11126	0450	0744	1188	YYY	-0000	21	450	744	356	188	1,25	6,45	2,55	300	-
		1122				32	450	1122	534	282	1,25	9,40	4,00	500	-
		1338				40	450	1338	638	332	1,28	11,38	4,76	500	-
		1689				50	450	1689	808	412	1,32	14,60	6,00	750	-
11126	0500	0744	1188	YYY	-0000	21	500	744	389	203	1,27	6,87	2,67	300	-
		1122				32	500	1122	585	309	1,25	10,07	4,18	500	-
		1338				40	500	1338	698	363	1,28	12,17	4,99	750	-
		1689				50	500	1689	885	456	1,30	15,58	6,30	1000	-
11126	0600	0744	1188	YYY	-0000	21	600	744	455	232	1,32	7,70	2,90	300	-
		1122				32	600	1122	684	361	1,25	11,40	4,55	500	11126-03
		1338				40	600	1338	816	424	1,28	13,74	5,45	750	11126-04
		1689				50	600	1689	1035	538	1,28	17,55	6,90	1000	11126-07
		1959				60	600	1959	1247	639	1,31	20,65	8,20	1250	-
11126	0750	0744	1188	YYY	-0000	21	750	744	552	273	1,38	8,95	3,25	500	-
		1122				32	750	1122	828	437	1,25	13,40	5,10	750	-
		1338				40	750	1338	989	514	1,28	16,10	6,13	1000	-
		1689				50	750	1689	1253	662	1,25	20,50	7,80	1250	-
		1959				60	750	1959	1483	783	1,25	24,40	9,20	1500	-

CE 05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

BATHROOM RADIATORS FREE-STANDING INSTALLATION IN OPTION

FREE-STANDING INSTALLATION	COLOUR	REF.NR.
 <p>FREE-STANDING INSTALLATION</p>	BSM-S	
	RAL 9016	118100300009016
	COLOUR	11810030000xxxx
<ul style="list-style-type: none"> free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosets in the colour RAL 9016. free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosets. 		
 <p>FREE-STANDING INSTALLATION</p>	BSM-ES	
	STAINLESS STEEL	*
<ul style="list-style-type: none"> free-standing radiators in stainless steel: 2 welded lateral supports, 1 foot (H = 150 mm) and 1 roset in stainless steel. <p>* Please indicate code -0001 for "Finish" when ordering.</p>		
 <p>FREE-STANDING INSTALLATION</p>	HDM	
	RAL 9016	118100100009016
	COLOUR	11810010000xxxx
<ul style="list-style-type: none"> free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 1 foot (H = 150 mm) and 1 roset in the colour RAL 9016. free-standing radiators in other colours: 2 separate lateral supports, 1 foot (H = 150 mm) in the colour of the radiator and 1 chrome plated roset. 		
 <p>FREE-STANDING INSTALLATION</p>	HRM	
	RAL 9016	118100400009016
	COLOUR	11810040000xxxx
<ul style="list-style-type: none"> free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosets in the colour RAL 9016. free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosets. 		
 <p>FREE-STANDING INSTALLATION</p>	HR2	
	RAL 9016	118100500009016
	COLOUR	11810050000xxxx
<ul style="list-style-type: none"> free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosets in the colour RAL 9016. free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosets. 		
 <p>FREE-STANDING INSTALLATION</p>	HF2	
	RAL 9016	*
	COLOUR	*
<ul style="list-style-type: none"> free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosets in the colour RAL 9016. free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosets. <p>* Please indicate code -0001 for "Finish" when ordering.</p>		


ACCESSORIES	COLOUR	REF.NR.
BSM-S / BSM-ES / BSM-C		
<p>DRYING- AND STACKING RACK STRAIGHT</p> 	STAINLESS STEEL	118300500009993
• h = 15 mm; b = 350 mm; d = 94 mm; a = 45 mm		
BSRM-S / BSRM-ES / BSRM-C		
<p>DRYING- AND STACKING RACK CURVED</p> 	STAINLESS STEEL	118300600009993
• h = 15 mm; b = 338 mm; d = 94 mm; a = 45 mm		
HF / HF2		
<p>TOWEL RAIL</p> 	CHROME	118322400000099
• h = 22 mm; b = 670 mm; d = 85 mm; a = 60 mm		
HF / HF2		
<p>HOOK O-RING</p> 	CHROME	118360200000099
• h = 22 mm; b = 22 mm; d = 42 mm		
HF / HF2		
<p>HOOK WITH A WIDE GROOVE</p> 	CHROME	118340200000099
• h = 22 mm; b = 22 mm; d = 42 mm		
HF / HF2		
<p>DRYING- AND STACKING RACK NARROW</p> 	CHROME	118300900000099
• h = 22 mm; b = 385 mm; d = 163 mm; a = 30 mm		
HF / HF2		
<p>DRYING- AND STACKING RACK LARGE</p> 	CHROME	118301200000099
• h = 22 mm; b = 530 mm; d = 163 mm; a = 30 mm		

d = distance front of the accessory up to front of the radiator
a = distance accessory up to the radiator

available from stock

BATHROOM RADIATORS ACCESSORIES

IN OPTION


ACCESSORIES	COLOUR	REF.NR.
 <p>FOLDING DRYING AND STACKING RACK</p>	BSM-S / BSRM-S / BSM-ES / BSRM-ES / BSM-C / BSRM-C	
	CHROME	118300100000099
	HDM / HDRM / HRM / HRBM	
	CHROME	118300200000099
HX		
CHROME	118300300000099	
HRM-C / HRBM-C		
CHROME	118300400000099	

- Standard included with Malva Lacquered, Malva Chrome, Prado, Iris, Agave Lacquered, Agave Chrome.
- 380 x 158 mm


available from stock

BATHROOM RADIATORS CONNECTIONS

COCOS PLUS: C-PL
AGAVE LACQUERED: HR2
ASTER: HF (NON STOCK)
ASTER: HF2

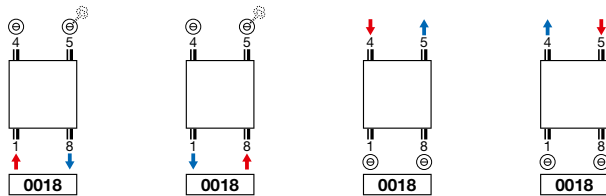

MALVA LACQUERED: BSM-S / BSRM-S
MALVA STAINLESS STEEL: BSM-ES / BSRM-ES
MALVA CHROME: BSM-C / BSRM-C
PRADO: HX
IRIS: HDM / HDRM
AGAVE LACQUERED: HRM / HRBM
AGAVE CHROME: HRM-C / HRBM-C
ASTER: HF (STOCK) / HF (NON STOCK)

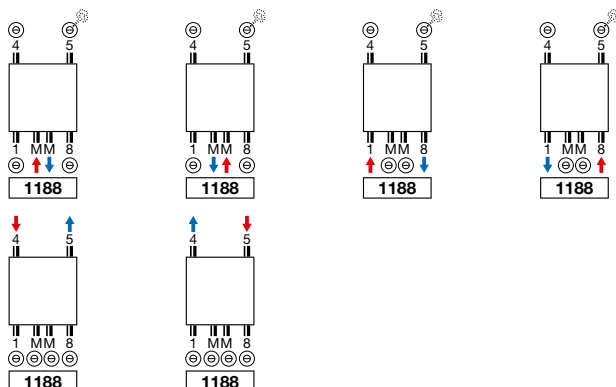

Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.