

BRYCE PLUS VERTICAL (BV100)



TYPES

- Vertical: Bryce Plus BV100 (depth)

COLOURS

- Standard colour S600 (fine texture white)
- Not available in collection Pure Grey
- Not available in colours Gloss White and Jet Black
- Extensive colour chart see p. 16

SPECIAL

- Composed out of vertical aluminium profiles
- Protection against internal corrosion: protecting product Protect 1+1
- The Bryce is awarded with the Henry van de Velde label 2007, the Product Design Award Hannover 2008, Design Plus Award - Material Vision, Frankfurt 2007, the Red Dot Product Design Award 2008 and nominated for the Designpreis 2009 and the European Aluminium Award 2008.

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 40

CONNECTION

- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve
- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect 1+1 or a similar product should be added to the circuit.**





PROTECT 1+1
Ref. nr. 11FH55001

ABOUT BRYCE PLUS VERTICAL

Heat in a new light

A designer radiator that constantly evokes new light shades and contrasts due to the fine, irregular structure of the front, and in this way contributes to a pleasant, natural ambience in the intimate space. A perfect example of applied design and a valuable asset in any contemporary interior.

RECOMMENDED CONNECTION (0066)




ref. nr. 11821030000099
Fittings, see p. 313

RECOMMENDED FOR THE BATHROOM IN OPTION



towel rail (aluminium)
ref. nr. 11832440000000 (375 mm)




rectangular bracket (white)
ref. nr. 118370200000600

Other accessories, see p. 28



HOW TO ORDER BRYCE PLUS VERTICAL

Delivery time 15 - 30 working days
(transport duration not included)

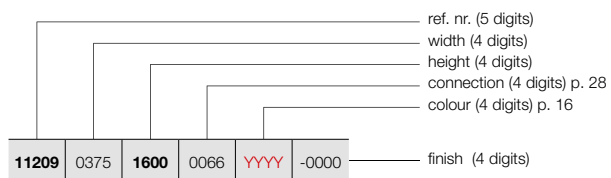


BRYCE PLUS VERTICAL (BV100)



BV100

HOW TO ORDER STOCK RADIATOR BRYCE PLUS VERTICAL






Delivery time 5 working days
(transport duration not included)



REFERENCE CODE CUSTOM MADE BRYCE PLUS VERTICAL	TECHNICAL DATA										short ref. nr. S600 stock	short ref. nr. M301 stock				
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)							
REF. NR. BRYCE PLUS VERTICAL BV100 : 11209																
11209	0375	1600	0066	YYYY	-0000	-	375	1600	1238	624	1,34	19,65	1,35	-	-	-
		1800				-	375	1800	1373	700	1,32	22,03	1,48	-	-	-
		2000				-	375	2000	1503	774	1,30	24,40	1,60	-	-	-
		2200				-	375	2200	1628	838	1,30	26,65	1,75	-	-	-
11209	0450	1600	0066	YYYY	-0000	-	450	1600	1482	751	1,33	23,73	1,60	-	-	-
		1800				-	450	1800	1644	838	1,32	26,53	1,80	-	11209-01	11209-02
		2000				-	450	2000	1799	921	1,31	29,33	2,00	-	-	-
		2200				-	450	2200	1950	1004	1,30	32,20	2,07	-	-	-
11209	0525	1600	0066	YYYY	-0000	-	525	1600	1726	875	1,33	27,82	1,85	-	-	-
		1800				-	525	1800	1914	975	1,32	31,04	2,13	-	11209-03	11209-04
		2000				-	525	2000	2095	1067	1,32	34,27	2,40	-	-	-
		2200				-	525	2200	2270	1168	1,30	37,75	2,38	-	-	-
11209	0600	1600	0066	YYYY	-0000	-	600	1600	1969	998	1,33	31,90	2,10	-	-	-
		1800				-	600	1800	2184	1113	1,32	35,55	2,45	-	11209-08	11209-09
		2000				-	600	2000	2391	1218	1,32	39,20	2,80	-	11209-05	11209-06
		2200				-	600	2200	2590	1326	1,31	43,30	2,70	-	-	-

CE in conformity with EN442-1: radiators and convectors


For heat outputs in other regimes, see p. 308 (correction factors)

ACCESSORIES		WIDTH RADIATOR	COLOUR	REF.NR.
TOWEL RAIL			BV100	
		375 mm	ALUMINIUM	118324400000000
		450 mm	ALUMINIUM	118324500000000
		525 mm	ALUMINIUM	118324600000000
		600 mm	ALUMINIUM	118324700000000
<ul style="list-style-type: none"> Towel rail in aluminium h = 50 mm; b = 435, 510, 585, 660 mm; d = 47 mm; a = 43 mm 				
		WIDTH TOWEL RAIL	COLOUR	REF.NR.
SHORT BRACKET			BV100	
		240 mm	WHITE	118370000000600
		240 mm	BLACK	118370000000300
		240 mm	PIGEON BLUE	118370000000601
<ul style="list-style-type: none"> d = 49,35 mm; a = 39,35 mm 				
LONG BRACKET			BV100	
		440 mm	WHITE	118370100000600
		440 mm	BLACK	118370100000300
		440 mm	PIGEON BLUE	118370100000601
<ul style="list-style-type: none"> d = 49,35 mm; a = 39,35 mm 				
RECTANGULAR BRACKET			BV100	
		286 x 110 mm	WHITE	118370200000600
		286 x 110 mm	BLACK	118370200000300
		286 x 110 mm	PIGEON BLUE	118370200000601
<ul style="list-style-type: none"> d = 49,35 mm; a = 39,35 mm 				
SQUARE BRACKET			BV100	
		240 x 240 mm	WHITE	118370300000600
		240 x 240 mm	BLACK	118370300000300
		240 x 240 mm	PIGEON BLUE	118370300000601
<ul style="list-style-type: none"> d = 49,35 mm; a = 39,35 mm 				

d = distance front of the accessory up to front of the radiator
a = distance accessory up to the radiator
available from stock

BRYCE CONNECTIONS

BRYCE PLUS VERTICAL: BV100



Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.